


5/3-directional valve, Series 581, size 2

5812491530

General series information
AVENTICS Series 581 - Size 2 Standardized valves

- The AVENTICS series 581 complies with the ISO 5599-1 valve standard. Due to the high degree of modularity, the series offers all valve functions, integrated throttle valves, various pilot coils and an extensive range of accessories.

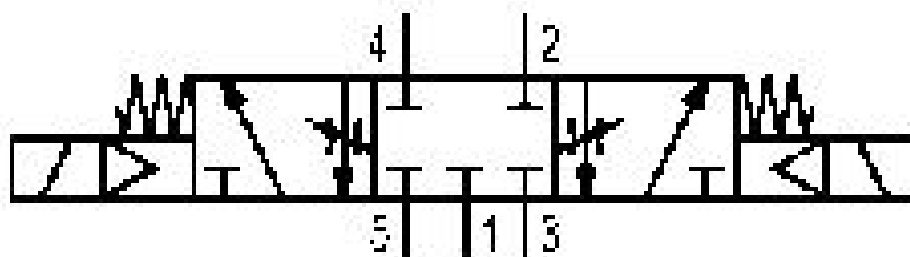

Technical data

Industry	Industrial
Activation	Electrically
Nominal flow Q_n	2100 l/min
Switching principle	5/3
Version	Closed Center
Compressed air connection output	Base plate ISO 5599-1
Working pressure min.	3 bar
Working pressure max	16 bar
DC operating voltage	24 V
Voltage tolerance DC	-10% / +10%
Voltage tolerance AC 50 Hz	-10% / +10%
Manual override	without

Electrical connection type	Plug
Electrical connection size	EN 175301-803, form A
Sealing principle	soft seal
Pilot	Internal
Standards	ISO 5599-1
Pilot valve width	30x22 mm CNOMO
Valve type	Spool valve
Blocking principle	Single base plate principle
Connection type	Plate connection
Compressed air connection input	Base plate ISO 5599-1
Compressed air connection, exhaust	Base plate ISO 5599-1
Compressed air connection pilot exhaust	M5
Power consumption DC	6.7 W
Flow conductance C	8.9 l/(s*bar)
Throttle	with throttle
Frame size	ISO 2
Control pressure min.	3 bar
Control pressure max.	16 bar
Min. ambient temperature	-15 °C
Max. ambient temperature	50 °C
Min. medium temperature	-15 °C
Max. medium temperature	50 °C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air min.	0 mg/m ³
Oil content of compressed air max.	5 mg/m ³
Protection class with connection	IP65
Duty cycle	100 %
Typ. switch-on time	17 ms
Typ. switch-off time	36 ms
mounting screws	with hexagon socket
Mounting screw tightening torque	3.5 Nm
Weight	0.71 kg
Housing material	Aluminum
Seal material	Acrylonitrile butadiene rubber
Part No.	5812491530

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

