


5/3-directional valve, Series 581, size 2

5812791440

ISO 5599-1, size 2, series 581

- $Q_n = 2100 \dots 2700$ l/min

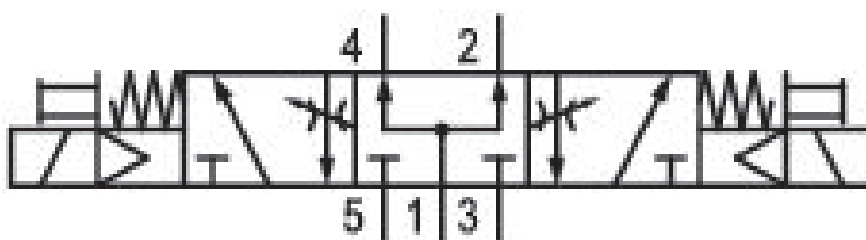

Technical data

Industry
Industrial

Activation
Electrically

Nominal flow Q_n
2100 l/min

Switching principle
5/3

Version
Pressurized Center

Compressed air connection output
Base plate ISO 5599-1

Working pressure min.
3 bar

Working pressure max
16 bar

Operational voltage AC at 50 Hz
230 V

Voltage tolerance AC 50 Hz
-10% / +10%

Manual override
without detent

Electrical connection type
Plug

Electrical connection size
EN 175301-803, form A

Sealing principle
Soft Seal

Pilot
Internal

Standards
ISO 5599-1

Pilot valve width
30x22 mm CNOMO

Valve type
Spool valve

Blocking principle
Single base plate principle

Connection type
Plate connection

Compressed air connection input
Base plate ISO 5599-1

Compressed air connection, exhaust
Base plate ISO 5599-1

Compressed air connection pilot exhaust
M5

Holding power AC 50 Hz
10.8 VA

Switch-on power AC 50 Hz
15.2 VA

Flow conductance C
8.9 l/(s*bar)

Throttle
with throttle

Frame size
ISO 2

Control pressure min.
3 bar

Control pressure max.
16 bar

Min. ambient temperature
-15 °C

Max. ambient temperature
50 °C

Min. medium temperature
-15 °C

Max. medium temperature
50 °C

Medium

Compressed air

Max. particle size
50 µm

Oil content of compressed air min.
0 mg/m³

Oil content of compressed air max.
5 mg/m³

Protection class with connection
IP65

Duty cycle
100 %

Typ. switch-on time
17 ms

Typ. switch-off time
36 ms

mounting screws
with hexagon socket

Mounting screw tightening torque
3.5 Nm

Weight
0.71 kg

Housing material
Aluminum

Seal material
Acrylonitrile butadiene rubber

Part No.
5812791440

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

Dimensions

