

# WL9-3N1102P08

W9

SMALL PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type          | Part no. |
|---------------|----------|
| WL9-3N1102P08 | 1076073  |

Other models and accessories → [www.sick.com/W9](http://www.sick.com/W9)

### Detailed technical data

#### Features

|  |  |
|--|--|
| <b>Functional principle</b>            | Photoelectric retro-reflective sensor                                  |
| <b>Functional principle detail</b>     | Without reflector minimum distance (autocollimation/coaxial optics)    |
| <b>Dimensions (W x H x D)</b>          | 12.2 mm x 50 mm x 23.6 mm  |
| <b>Housing design (light emission)</b> | Rectangular  |
| <b>Mounting hole</b>                   | M3   |
| <b>Sensing range max.</b>              | 0 mm ... 290 mm <sup>1)</sup>  |
| <b>Sensing range</b>                   | 0 mm ... 125 mm <sup>1)</sup>  |
| <b>Type of light</b>                   | Visible red light  |
| <b>Light source</b>                    | PinPoint LED <sup>2)</sup>   |
| <b>Light spot size (distance)</b>      | Ø 3 mm (35 mm)   |
| <b>Wave length</b>                     | 650 nm   |
| <b>Adjustment</b>                      | Single teach-in button   |
| <b>Special feature</b>                 | Front screen printing for a small light spot, packing unit = 50 pieces |
| <b>Special applications</b>            | Detecting small objects  |

<sup>1)</sup> Reflective tape REF-IRF-56.

<sup>2)</sup> Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

## Mechanics/electronics

|  |  |
|--|--|
| <b>Supply voltage <math>U_B</math></b>     | 10 V DC ... 30 V DC <sup>1)</sup>                                      |
| <b>Ripple</b>                              | < 5 V <sub>pp</sub> <sup>2)</sup>                                      |
| <b>Current consumption</b>                 | 30 mA <sup>3)</sup>  |
| <b>Switching output</b>                    | NPN <sup>4)</sup>  |
| <b>Output function</b>                     | Complementary  |
| <b>Switching mode</b>                      | Light/dark switching <sup>4)</sup>                                     |
| <b>Output current <math>I_{max}</math></b> | ≤ 100 mA <sup>5)</sup>   |
| <b>Response time</b>                       | < 0.5 ms <sup>6)</sup>   |
| <b>Switching frequency</b>                 | 1,000 Hz <sup>7)</sup>   |
| <b>Connection type</b>                     | Cable, 4-wire, 2 m <sup>8)</sup>                                       |
| <b>Cable material</b>                      | Plastic, PVC   |
| <b>Conductor cross section</b>             | 0.14 mm <sup>2</sup>   |
| <b>Circuit protection</b>                  | A <sup>9)</sup><br>B <sup>10)</sup><br>C <sup>11)</sup>                |
| <b>Protection class</b>                    | III  |
| <b>Weight</b>                              | 80 g   |
| <b>Polarisation filter</b>                 | ✓  |
| <b>Housing material</b>                    | Plastic, VISTAL®   |
| <b>Optics material</b>                     | Plastic, PMMA  |
| <b>Enclosure rating</b>                    | IP66<br>IP67<br>IP69K  |
| <b>Special feature</b>                     | Front screen printing for a small light spot, packing unit = 50 pieces |
| <b>Ambient operating temperature</b>       | -40 °C ... +60 °C  |
| <b>Ambient temperature, storage</b>        | -40 °C ... +75 °C  |
| <b>UL File No.</b>                         | NRKH.E181493   |

<sup>1)</sup> Limit values when operated in short-circuit protected network: max. 8 A.

<sup>2)</sup> May not fall below or exceed  $U_V$  tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> Q = light switching.

<sup>5)</sup> At and above  $T_u$  50 °C, a max. load current of  $I_{max} = 50$  mA is permitted.

<sup>6)</sup> Signal transit time with resistive load.

<sup>7)</sup> With light/dark ratio 1:1.

<sup>8)</sup> Do not bend below 0 °C.

<sup>9)</sup> A =  $V_S$  connections reverse-polarity protected.

<sup>10)</sup> B = inputs and output reverse-polarity protected.

<sup>11)</sup> C = interference suppression.


## Classifications

|                     |          |
|---------------------|----------|
| <b>ECLASS 5.0</b>   | 27270902 |
| <b>ECLASS 5.1.4</b> | 27270902 |
| <b>ECLASS 6.0</b>   | 27270902 |
| <b>ECLASS 6.2</b>   | 27270902 |

|                       |          |
|-----------------------|----------|
| <b>ECLASS 7.0</b>     | 27270902 |
| <b>ECLASS 8.0</b>     | 27270902 |
| <b>ECLASS 8.1</b>     | 27270902 |
| <b>ECLASS 9.0</b>     | 27270902 |
| <b>ECLASS 10.0</b>    | 27270902 |
| <b>ECLASS 11.0</b>    | 27270902 |
| <b>ECLASS 12.0</b>    | 27270902 |
| <b>ETIM 5.0</b>       | EC002717 |
| <b>ETIM 6.0</b>       | EC002717 |
| <b>ETIM 7.0</b>       | EC002717 |
| <b>ETIM 8.0</b>       | EC002717 |
| <b>UNSPSC 16.0901</b> | 39121528 |


### Adjustments

Single teach-in button

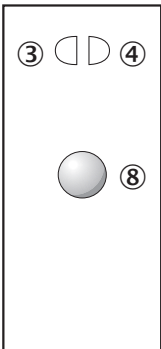


- ③ LED indicator yellow: Status of received light beam
- ④ LED indicator green: power on
- ⑧ Teach-in button

### Connection type




## Connection diagram

Cd-094




## Characteristic curve

WL9-3, red light, 290 mm

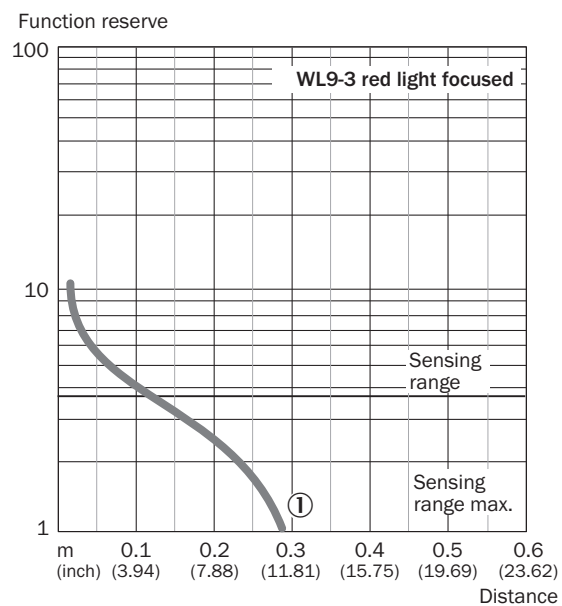

### Dimensional drawing (Dimensions in mm (inch))

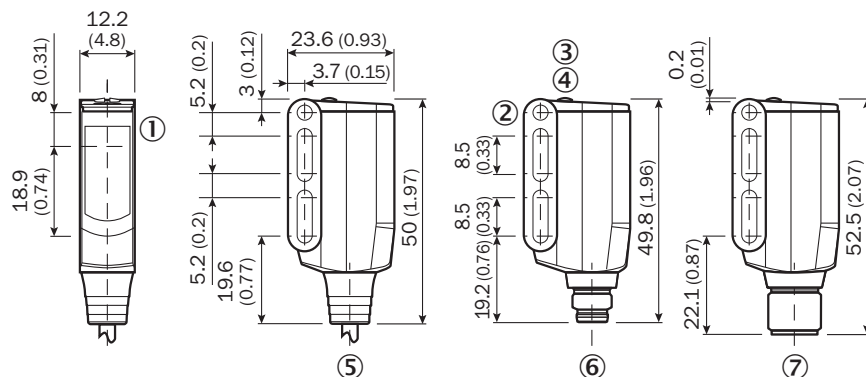


WL9-3, WSE9-3



- ① Sender and receiver optical axis center
- ② Mounting hole M3 (Ø 3.1 mm)
- ③ LED indicator yellow: Status of received light beam
- ④ LED indicator green: power on
- ⑤ Connecting cable or connector
- ⑥ Male connector M8, 4-pin
- ⑦ Male connector M12, 4-pin

### Recommended accessories

Other models and accessories → [www.sick.com/W9](http://www.sick.com/W9)

|   | Brief description  | Type        | Part no. |
|---|--|-------------|----------|
| <b>Mounting brackets and plates</b>   |  |             |          |
|  | Mounting bracket, steel, zinc coated, mounting hardware included   | BEF-WN-W9-2 | 2022855  |
| <b>Reflectors</b>   |  |             |          |
|  | Rectangular, screw connection, 40 mm x 60 mm, PMMA/ABS, Screw-on, 2 hole mounting  | PL40A       | 1012720  |
| <b>Others</b>   |  |             |          |
|  | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, M12, 4-pin, straight, A-coded</li> <li>• <b>Description:</b> Unshielded</li> <li>• <b>Connection systems:</b> Screw-type terminals</li> <li>• <b>Permitted cross-section:</b> ≤ 0.75 mm<sup>2</sup></li> </ul> | STE-1204-G  | 6009932  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)